Street-Routing Problems

Lecture 27
Sections 5.1 - 5.2

Robb T. Koether

Hampden-Sydney College

Wed, Mar 28, 2018

Outline

Street-Routing Problems

- There are many problems that fall under the heading "Street-Routing Problems."
- We will consider five of them.

Street-Routing Problems

- There are many problems that fall under the heading "Street-Routing Problems."
- We will consider five of them.
  - The Security Guard Problem

Street-Routing Problems

- There are many problems that fall under the heading "Street-Routing Problems."
- We will consider five of them.
  - The Security Guard Problem
  - The Mail Carrier Problem

Street-Routing Problems

- There are many problems that fall under the heading "Street-Routing Problems."
- We will consider five of them.
  - The Security Guard Problem
  - The Mail Carrier Problem
  - The Königsberg Bridge Problem (famous)

Street-Routing Problems

- There are many problems that fall under the heading "Street-Routing Problems."
- We will consider five of them.
  - The Security Guard Problem
  - The Mail Carrier Problem
  - The Königsberg Bridge Problem (famous)
  - The Bridges of Madison County

Street-Routing Problems

- There are many problems that fall under the heading "Street-Routing Problems."
- We will consider five of them.
  - The Security Guard Problem
  - The Mail Carrier Problem
  - The Königsberg Bridge Problem (famous)
  - The Bridges of Madison County
  - The Traveling Salesman Problem (famous)

The Security Guard Problem

Example (The Security Guard Problem)

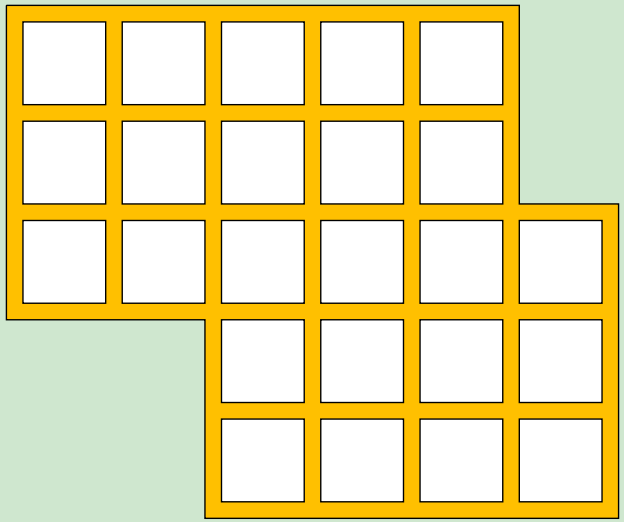

- A security guard must patrol every street of the neighborhood, checking both sides of the street as he goes.
- What route should he follow to minimize the total distance?
- Must he walk some streets twice?

The Mail Carrier Problem

Example (The Mail Carrier Problem)

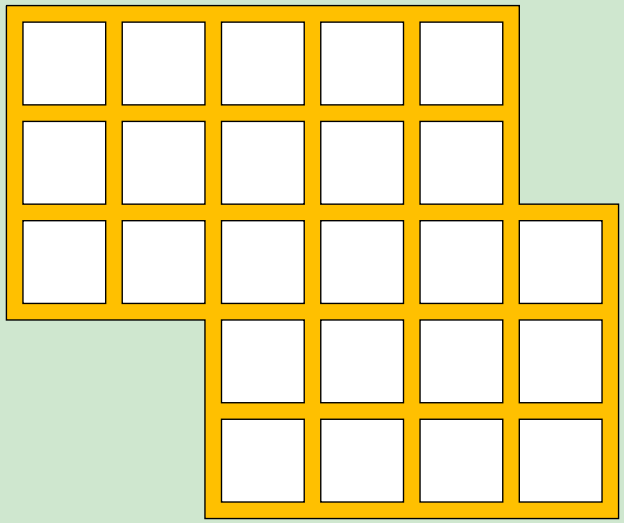

- A mail carrier must deliver mail to *both sides* of every street of the neighborhood, except the boundary.
- What route should he follow to minimize the total distance?
- Must he walk some streets (same side) twice?

The Königsberg Problem

Example (The Königsberg Problem)

- A Königsberger would like to take a stroll across the seven bridges of Königsberg.
- Can it be done without ever crossing the same bridge twice?
- Does it matter where the stroller starts?

The Bridges of Madison County Problem

Example (The Bridges of Madison County Problem)

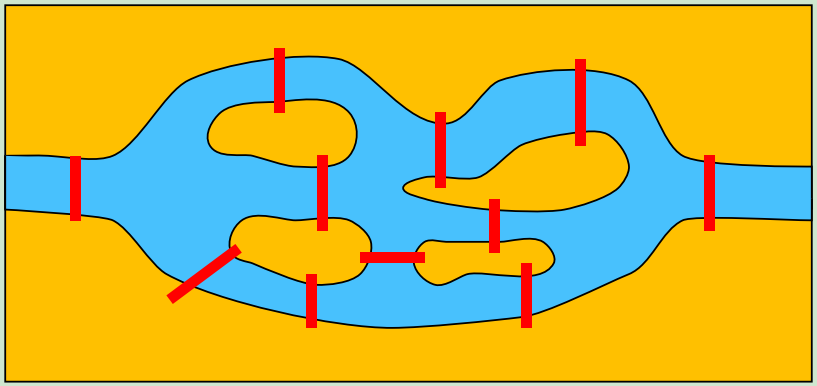

- A photographer wants to photograph each of the 11 bridges of Madison County.
- He must cross the bridge to photograph it and each bridge has a $5 toll.
- What route will minimize the total cost?

The Bridges of Madison County Problem

Example (The Bridges of Madison County Problem)

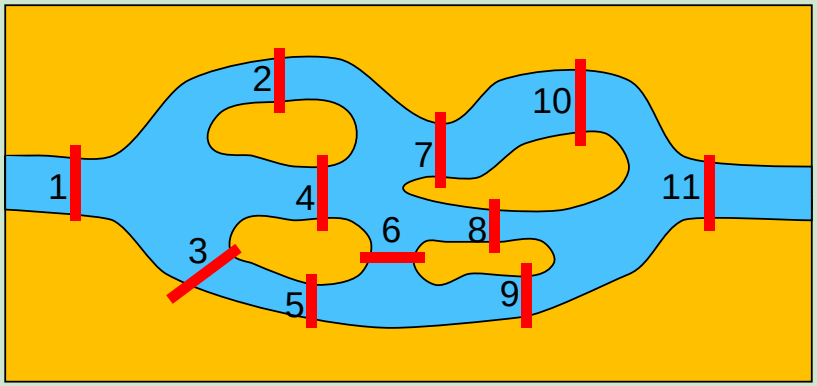

- A photographer wants to photograph each of the 11 bridges of Madison County.
- He must cross the bridge to photograph it and each bridge has a $5 toll.
- What route will minimize the total cost?

The Traveling Salesman Problem

Example (The Traveling Salesman Problem)

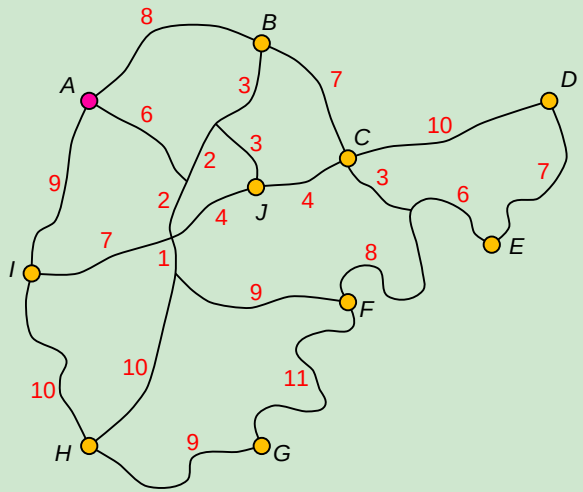

- A salesman is located in a city.
- He must make a trip during which he visits each of a number of other cities and return to his home city.
- He knows the distance from every city to every other city.
- What route will minimize the total distance traveled?

Outline

Definitions

Definition

A graph is a collection of vertices and edges. We normally draw the vertices as dots and the edges as lines. Each edge connects a pair of vertices.

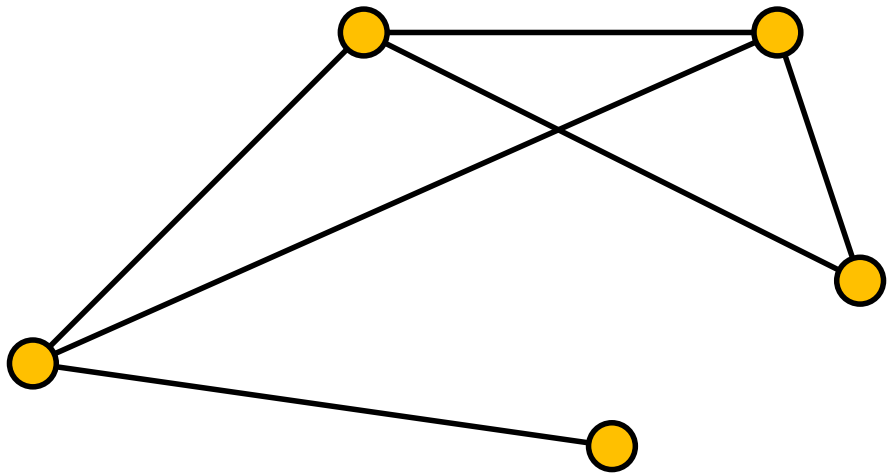

Definitions

- We can give the vertices labels, e.g., A, B, C, etc.
- Then use those labels to identify the edges, e.g., AB, AC, etc.

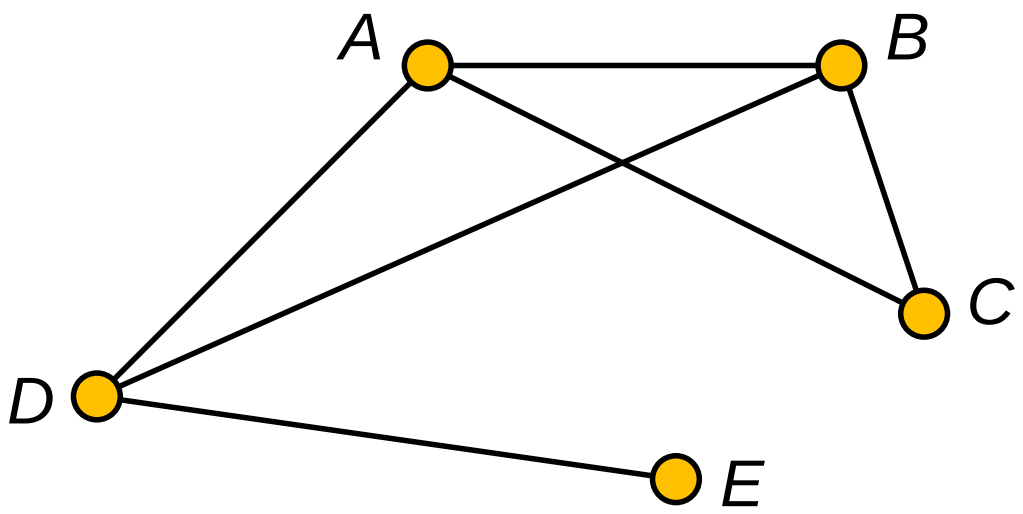

Definitions

Definition (Path)

A path is a sequence of edges, each edge adjacent to the next edge. We may denote a path by listing the vertices through which it passes, e.g., *DABC*.

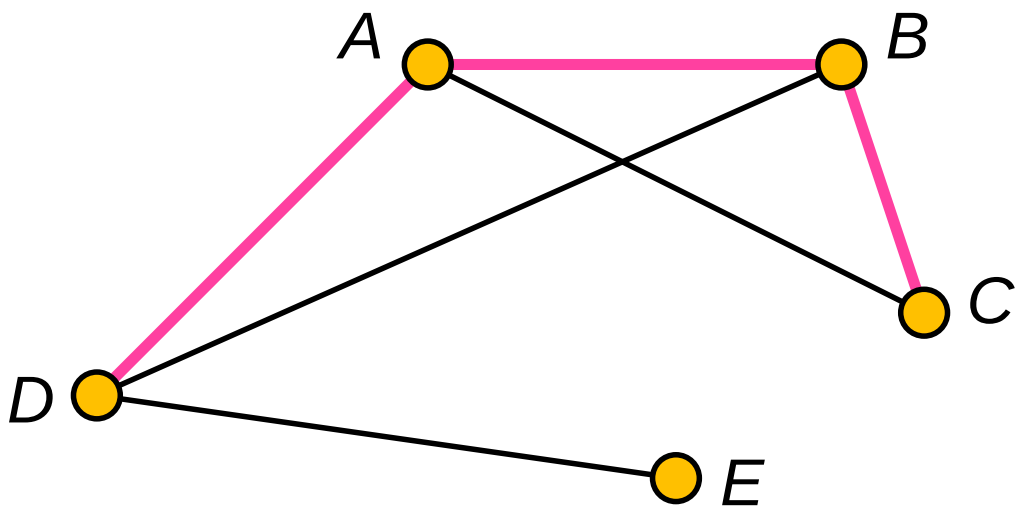

Definitions

Definition (Circuit)

A circuit is a path that begins and ends at the same vertex, e.g., *ABCA*.

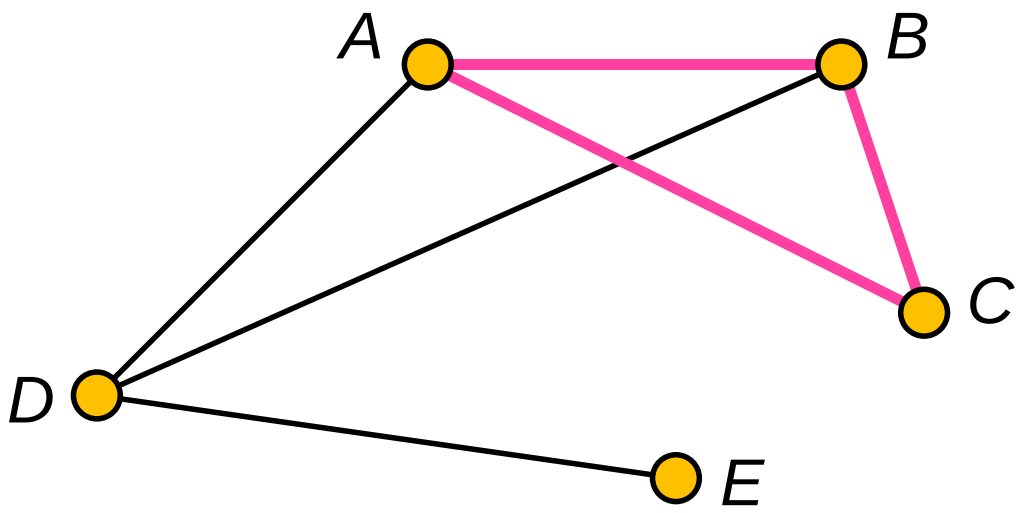

Definitions

Definition (Weighted Graph)

A weighted graph is a graph in which every edge is assigned a value (its weight).

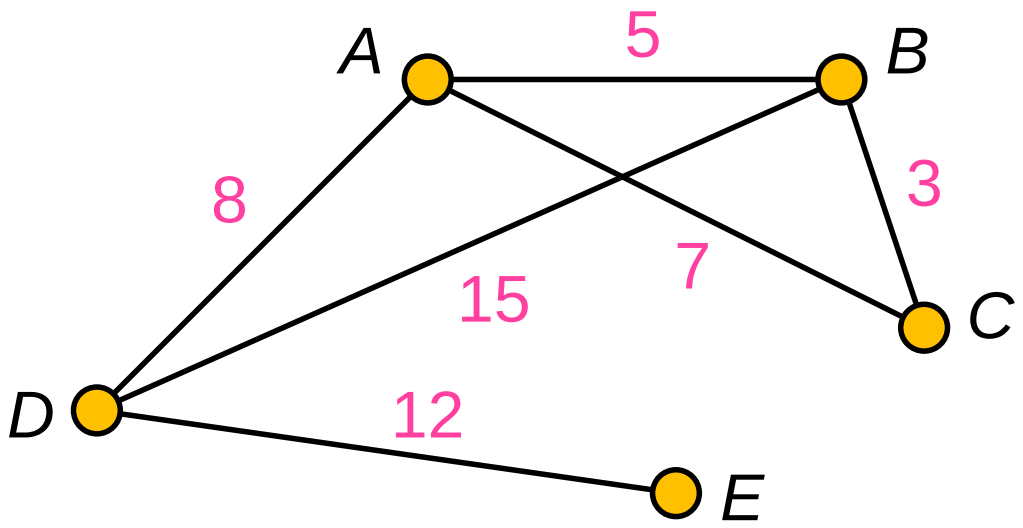

Social Networks

Example (Social Networks)

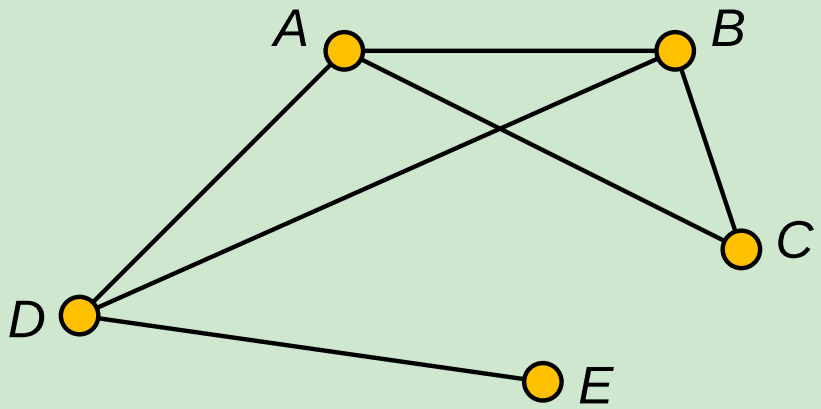

- Andy, Bob, Chuck, Dave, and Eddie all belong to a social network.
  - Andy is friends with Bob, Chuck, and Dave (and vice versa).
  - Bob is friends with Chuck and Dave (and vice versa).
  - Dave is friends with Eddie (and vice versa).

Social Networks

Example (Social Networks)

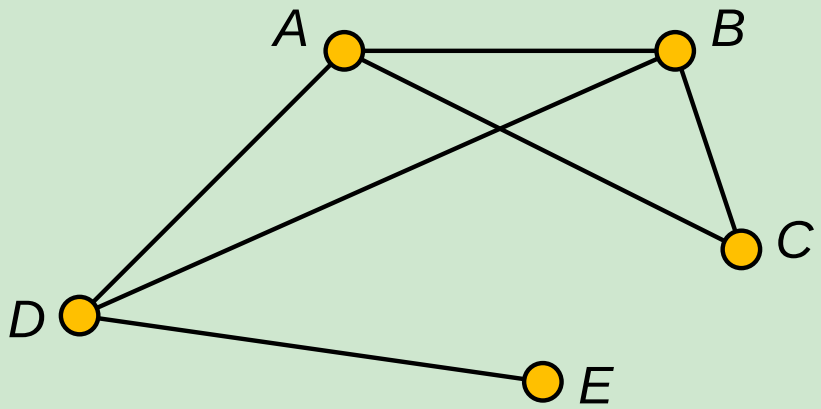

- Andy, Bob, Chuck, Dave, and Eddie all belong to a social network.
  - Andy is friends with Bob, Chuck, and Dave (and vice versa).
  - Bob is friends with Chuck and Dave (and vice versa).
  - Dave is friends with Eddie (and vice versa).

Outline

Example

Example (The Security Guard Problem)

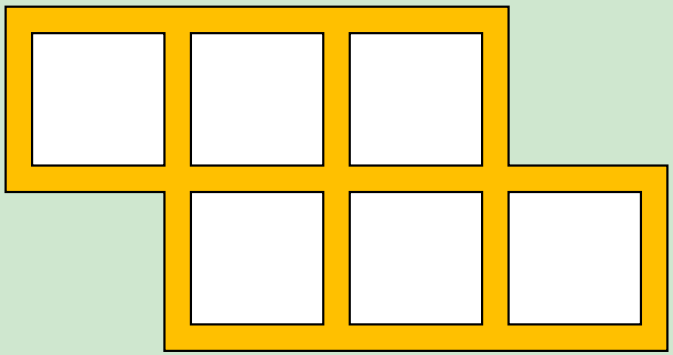

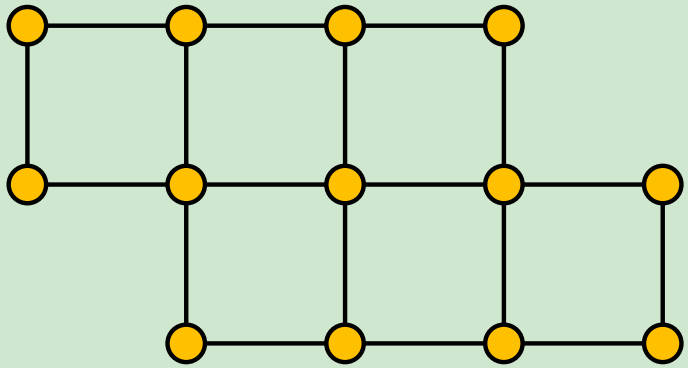

- In the Security Guard Problem, we want a path that traverses every edge *at least once* and has the minimal total length.

Example

Example (The Mail Carrier Problem)

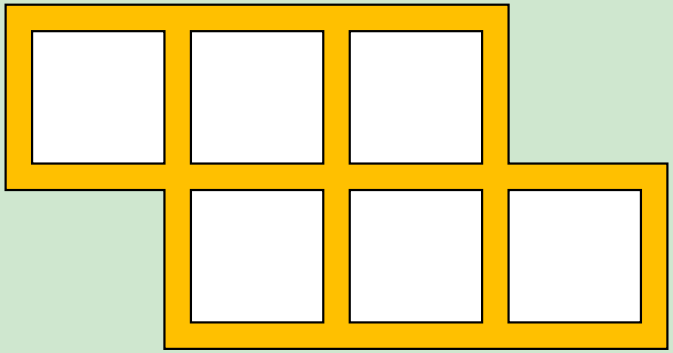

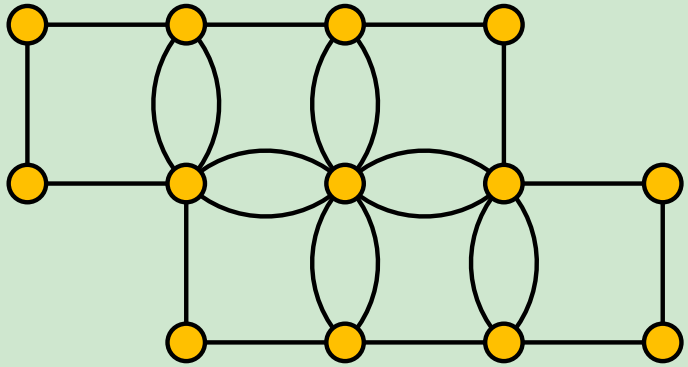

- In the Mail Carrier Problem, we want a path that traverses every edge *at least twice* (except the boundary) and has the minimal total length.
- With the duplicated edges, the Mail Carrier Problem is the same as the Security Guard Problem.

Example

Example (The Bridges of Königsberg Problem)

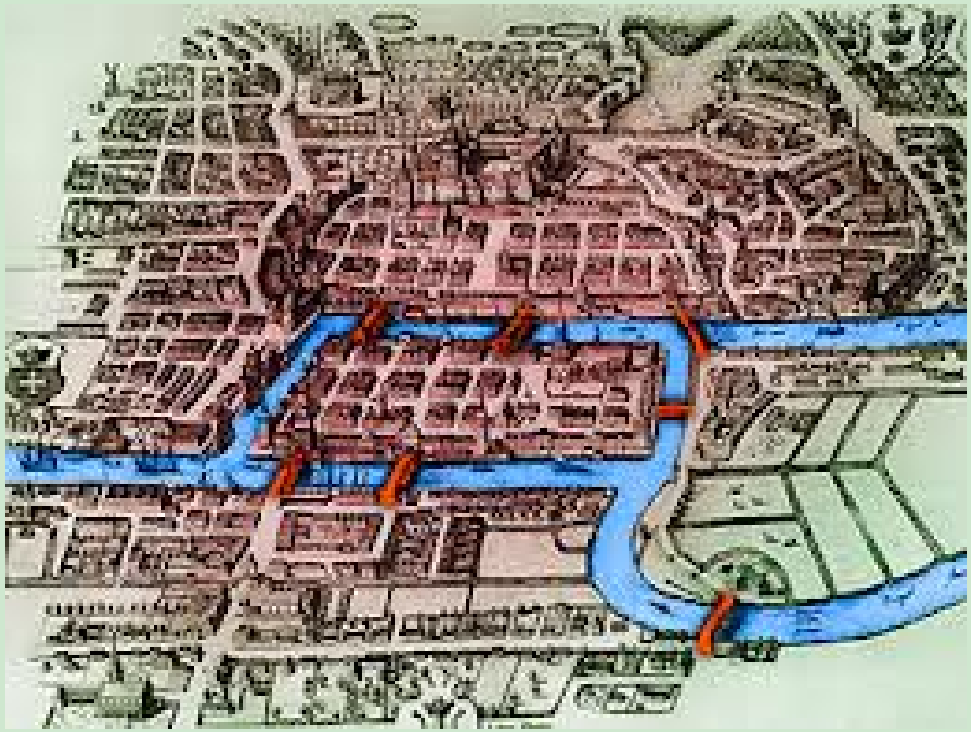

- In the Bridges of Königsberg Problem, we want a circuit that traverses each edge *exactly once*.

Example

Example (The Bridges of Königsberg Problem)

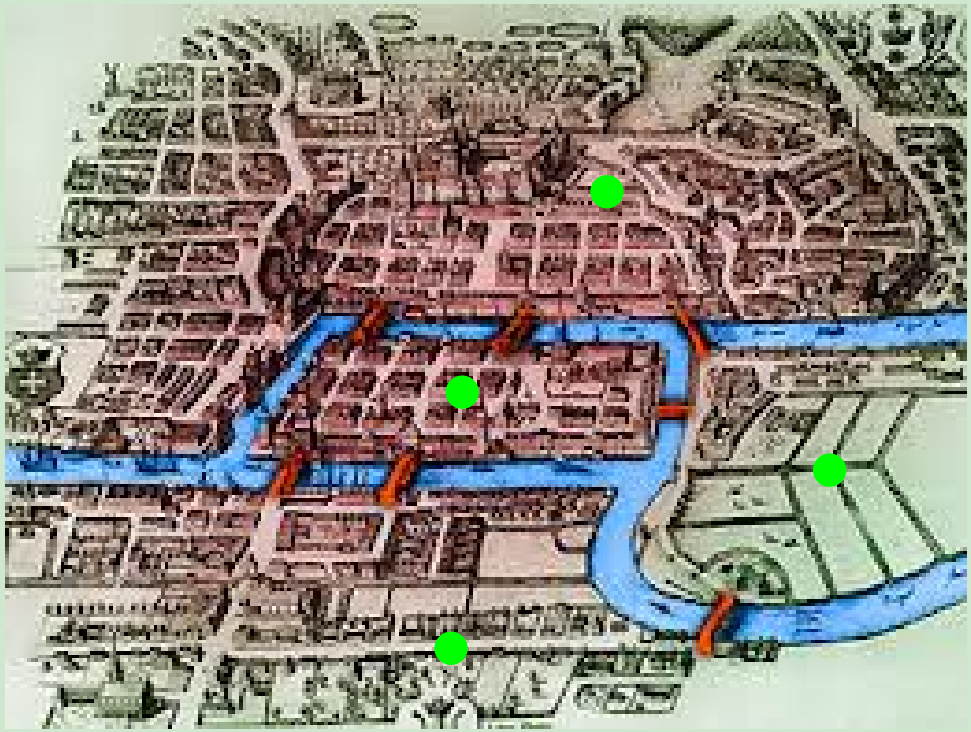

- In the Bridges of Königsberg Problem, we want a circuit that traverses each edge *exactly once*.

Example

Example (The Bridges of Königsberg Problem)

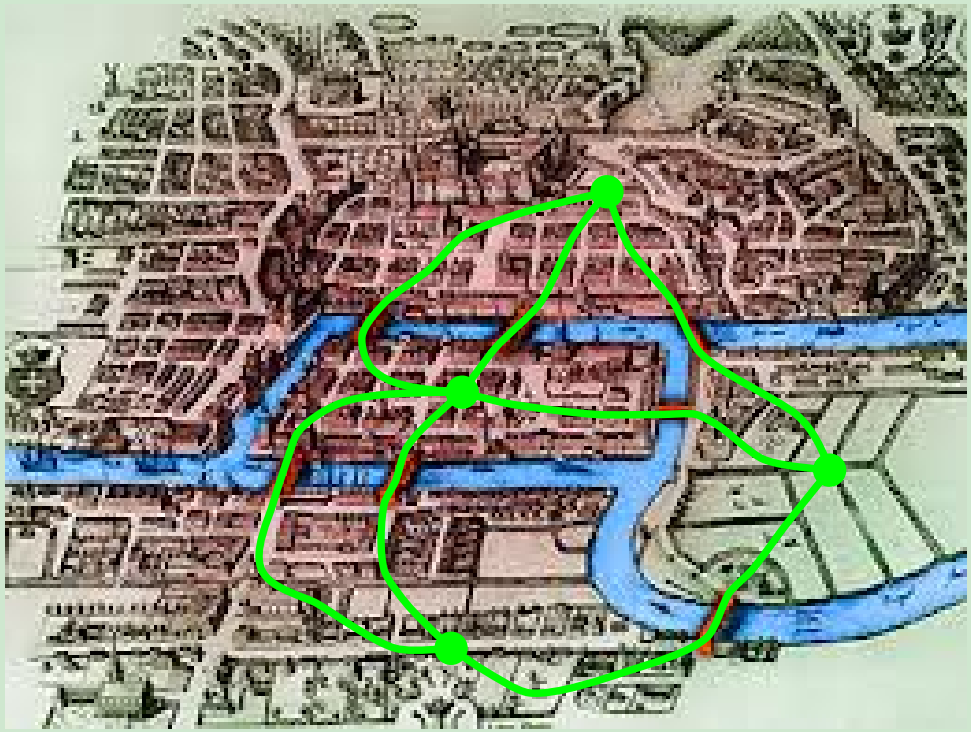

- In the Bridges of Königsberg Problem, we want a circuit that traverses each edge *exactly once*.

Example

Example (The Bridges of Königsberg Problem)

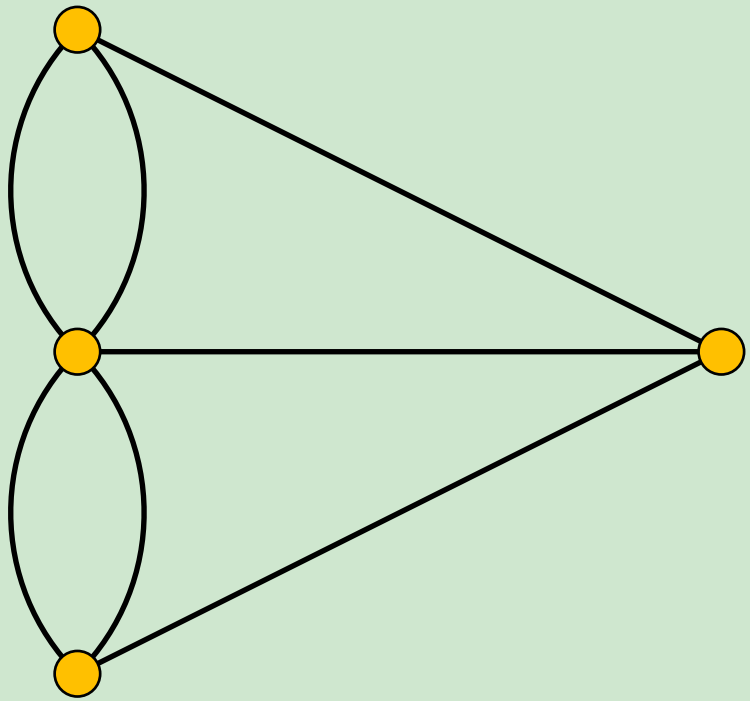

- We draw a graph that shows only the relevant parts.

Example

Example (The Bridges of Madison County Problem)

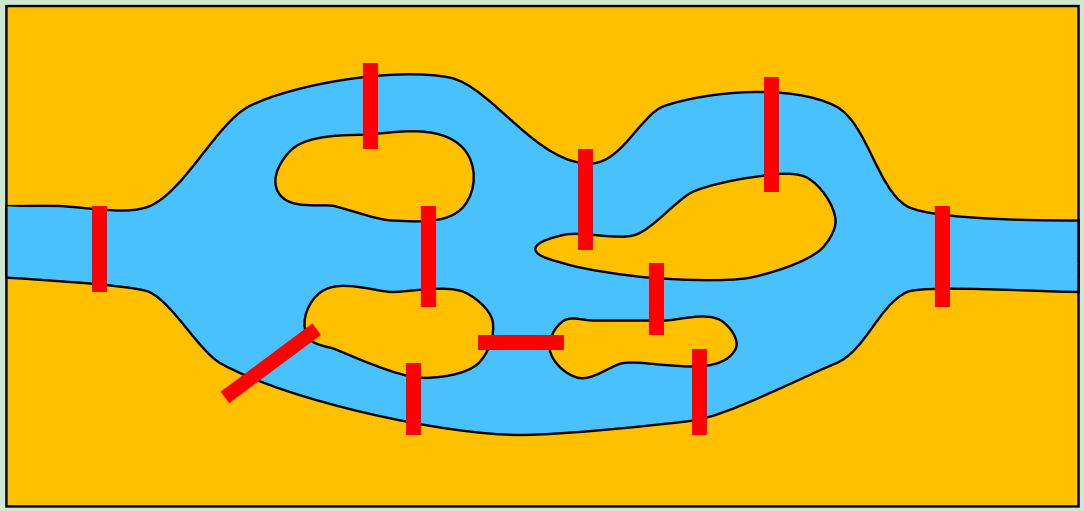

- In the Bridges of Madison County Problem, we want a circuit that traverses each edge *at least once* and has the minimal total length.
- This is the same as the Security Guard Problem.

Example

Example (The Bridges of Madison County Problem)

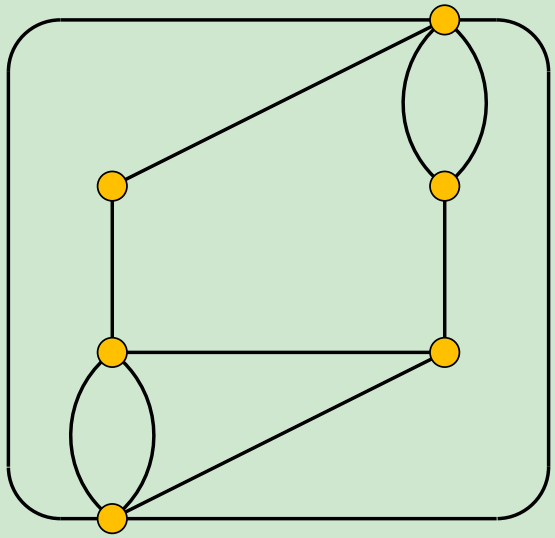

- In the Bridges of Madison County Problem, we want a circuit that traverses each edge *at least once* and has the minimal total length.
- This is the same as the Security Guard Problem.

Example

Example (The Traveling Salesman Problem)

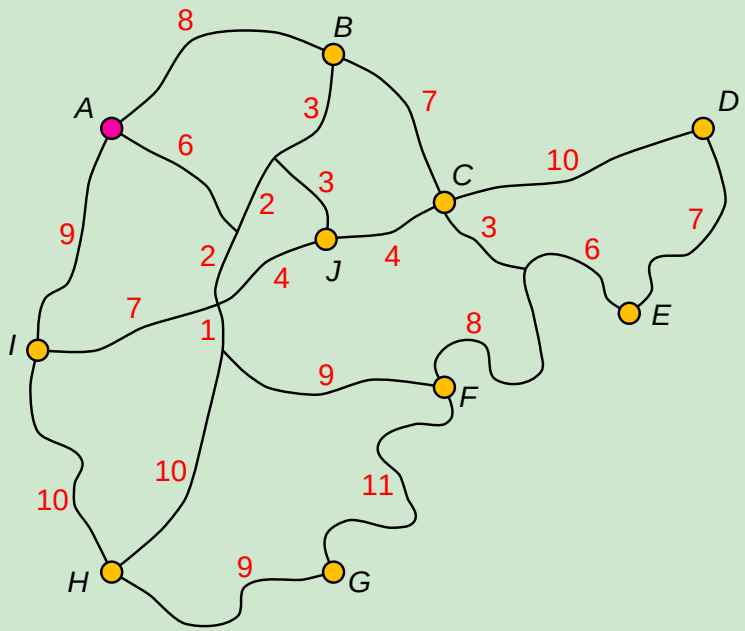

- In the Traveling Salesman Problem, we want a circuit that visits each vertex *at least once* and has the minimal total length.

Example

Example (The Traveling Salesman Problem)

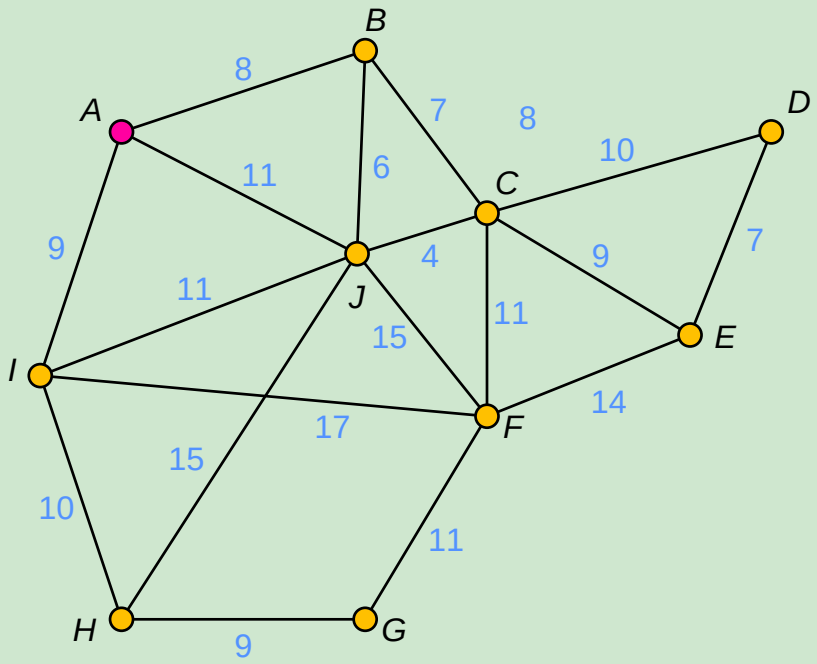

- In the Traveling Salesman Problem, we want a circuit that visits each vertex *at least once* and has the minimal total length.

Outline

Assignment

Assignment

- Chapter 5: Exercises 2, 3, 7, 13, 15, 19, 20, 21, 22, 27.